

Product Overview

WeatherTRAK Product Family Table of Key Features

WEATHERTRAK ET PRO² SMART WATER MANAGER SERIES:

- Small Wall Mount Enclosure/Pedestal
- Large Stainless Steel Pedestals
- Chassis Models

Commercial Series

Hardware Features

• Modular Station Counts	12-48 (Specified in 6-Station Increments)
• Diagnostic LEDs	Yes
• Wall Mount and Pedestal Enclosures	Yes
• Chassis versions	Yes
• Enclosure Finishes	Powder-coated Steel & Stainless Steel
• Flow Sensor Compatibility	Yes, Data Industrial & Creative Solutions Technology
• Handheld Remote Compatibility	Yes, TRC/Rainmaster
• Individual Master Valve and Pump Start	Yes
• Warranty	5 Years

Communication Features

- | | |
|-----------------------------------|----------------------------|
| • Basic and Central Communication | Yes, w/ upgrade from Basic |
|-----------------------------------|----------------------------|

Programming Features

• WeatherTRAK Scheduling Engine	Yes
• WeatherTRAK ET Everywhere™ Subscription Service	Yes w/ multi-year offerings
• Number of Programs / Start Times	4 / 2, w/ up 20 cycle/strokes
• Central Internet Management	Yes
• Remote Alert Notification	Yes, via email and/or text message

ET plus SERIES

Residential Series

Hardware Features

• Station Counts	6, 9, 12, 18 & 24
• Diagnostic LEDs	No
• Wall Mount	Yes
• Enclosure Finishes	High-Impact Plastic
• Combined Master Valve / Pump Start	Yes
• Warranty	3 Years

Communication Features

- | | |
|------------------------------|-----|
| • Basic Communication (only) | Yes |
|------------------------------|-----|

Programming Features

• WeatherTRAK Proven Scheduling Engine	Yes
• WeatherTRAK ET Everywhere Subscription Service	Yes
• Number of Programs / Start Times	2 / 2
• Alert Notification	Yes

How do I choose the right controller for my job?


Is the WeatherTRAK controller for **Commercial** or **Residential** use?

Commercial

Residential

See WeatherTRAK ET Pro²
Smart Water Manager

See WeatherTRAK ET plus

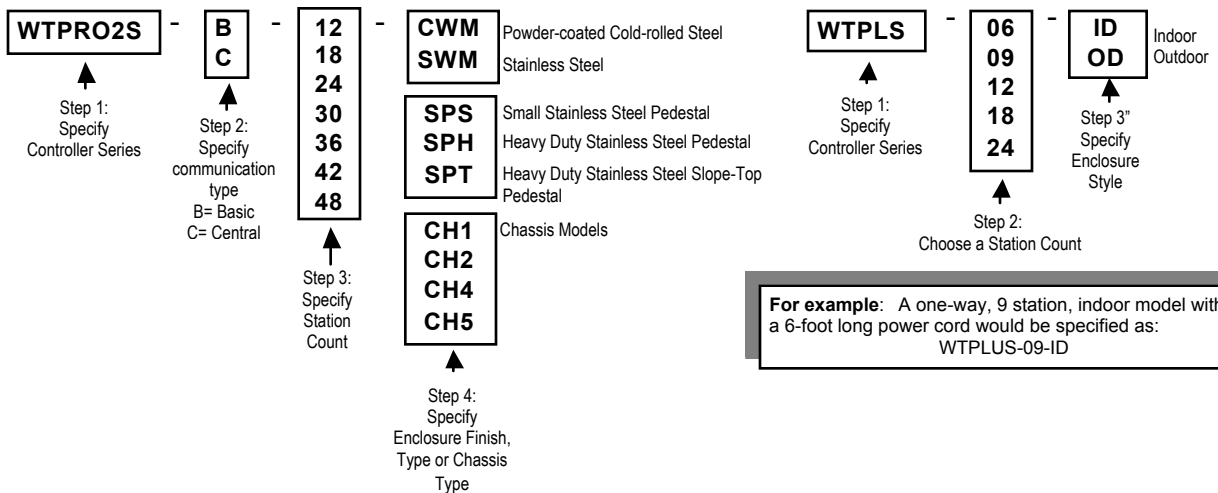

For example: A one-way, 18 station, stainless steel wall mount model would be specified as:
WTPRO2S-B-18-SWM

For example: A two-way, 18-station powder-coated, cold-rolled steel wall mount enclosure with a pedestal would be specified as: WTPRO2S-C-18-CWM with a WTPRO2S-CPED.

For example: A one-way, 9 station, indoor model with a 6-foot long power cord would be specified as:
WTPLUS-09-ID